

TELESCOPIC SPINDLE EXTENSION FOR GATE VALVE

Ref.200A

MATERIALS:

A two-piece hot-dip galvanized steel rod accord. to DIN EN 10240 (alternatively in stainless steel), coupling (bottom adapter) made of GJS400-15, galvanized accord. to DIN EN 12329 und DIN 50961 (alternatively made of stainless steel AISI 304). Square cap (top adapter) made of GJS400-15, galvanized accord. to DIN EN 12329 and DIN 50961 (alternatively in stainless steel AISI 304)..

| Valve spindle square | CD cover depth | Total length (L) spindle extension | Weight |
|-----------------------------------|----------------|------------------------------------|--------|
| Gate valve DN 40/50 SQ 14 | 0.75 - 1.00 m | 0.47 - 0.70 m | 2.7 kg |
| | 1.00 - 1.50 m | 0.70 - 1.20 m | 3.6 kg |
| | 1.25 - 1.80 m | 0.93 - 1.61 m | 4.7 kg |
| | 1.50 - 2.00 m | 1.03 - 1.82 m | 5.2 kg |
| | 1.70 - 2.70 m | 1.40 - 2.56 m | 6.8 kg |
| Gate valve DN 65/80 SQ 17 | 0.85 - 1.00 m | 0.45 - 0.67 m | 2.8 kg |
| | 1.00 - 1.50 m | 0.69 - 1.14 m | 3.8 kg |
| | 1.25 - 1.80 m | 0.85 - 1.45 m | 4.1 kg |
| | 1.50 - 2.00 m | 0.95 - 1.65 m | 4.7 kg |
| Gate valve DN 100-150 SQ 19 | 0.80 - 0.95 m | 0.40 - 0.58 m | 2.7 kg |
| | 1.00 - 1.20 m | 0.54 - 0.84 m | 3.1 kg |
| | 1.20 - 1.50 m | 0.64 - 1.05 m | 3.9 kg |
| | 1.25 - 1.80 m | 0.80 - 1.40 m | 4.2 kg |
| | 1.50 - 2.00 m | 0.95 - 1.64 m | 4.8 kg |
| Gate valve DN 175/200 SQ 24 | 0.90 - 1.00 m | 0.36 - 0.44 m | 3.3 kg |
| | 1.10 - 1.30 m | 0.52 - 0.79 m | 4.4 kg |
| | 1.25 - 1.80 m | 0.77 - 1.25 m | 6.0 kg |
| | 1.50 - 2.00 m | 0.86 - 1.46 m | 6.7 kg |
| | 1.70 - 2.70 m | 1.21 - 2.19 m | 9.9 kg |
| Gate valve DN 250-350 SQ 27 | 1.00 - 1.10 m | 0.37 - 0.49 m | 3.9 kg |
| | 1.10 - 1.30 m | 0.50 - 0.80 m | 5.1 kg |
| | 1.30 - 1.80 m | 0.71 - 1.15 m | 6.3 kg |
| | 1.50 - 2.00 m | 0.86 - 1.45 m | 7.3 kg |
| | 1.80 - 2.70 m | 1.16 - 2.05 m | 9.2 kg |



All the components can be substituted with equivalent or higher-class materials.

DAVINCI VALVES LTD, is constantly looking at all ways of improving our products and services related to the water, fire and industry sector and therefore we reserve the right to change, without prior notice, any of the data contained here. Please contact our Technical Sales Department for detailed advice.

© 2018 DAVINCI VALVES LTD.


www.davincivalves.com info@davincivalves.com +34 616553797 / +86 17340168233
18 Dongyu Street, Square One 11th Floor 1101. Jinjiang District, Chengdu, Sichuan Province, China

TELESCOPIC SPINDLE EXTENSION FOR GATE VALVE

Ref.200A

GENERAL CHARACTERISTICS:

Toolless assembly of the spindle extension with a stainless steel clip-pin. Connection pins made of stainless steel 1.4301. Transport security of the rod minimum of 150N. Self-locking in every adjustable position through a PE sealing collar on the steel tube. Torques according to GW336. Two-piece PE protection tube system with a bonded centring cap, universal bell and sealing. Completely dirt-proof and water repellent. Optional: Marking disc (double sided gas and water) as well as bell adanters/sealing inserts

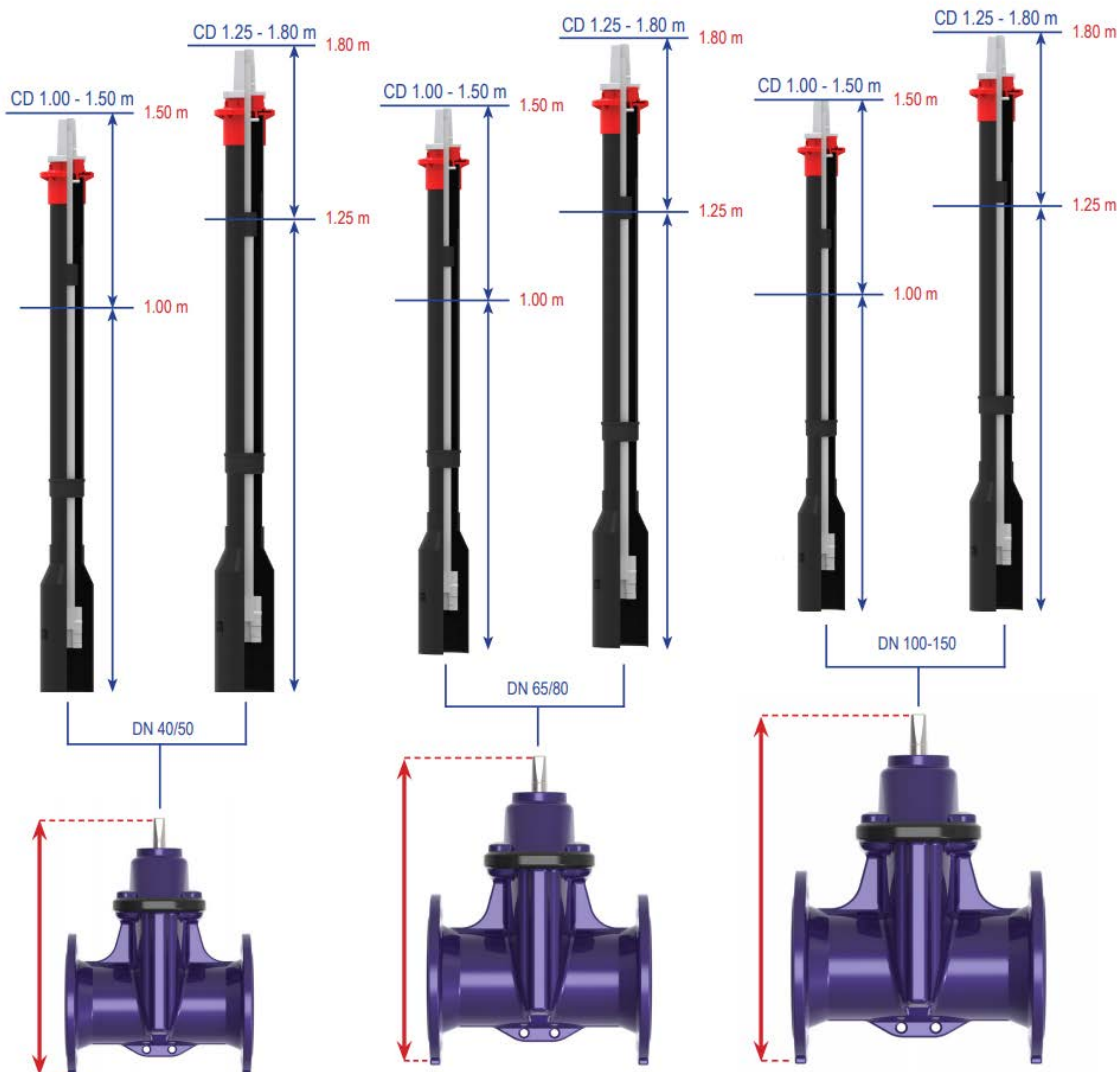

TECHNICAL DATA SHEET

All the components can be substituted with equivalent or higher-class materials.

DAVINCI VALVES LTD, is constantly looking at all ways of improving our products and services related to the water, fire and industry sector and therefore we reserve the right to change, without prior notice, any of the data contained here. Please contact our Technical Sales Department for detailed advice.

© 2018 DAVINCI VALVES LTD.

www.davincivalves.com info@davincivalves.com +34 616553797 / +86 17340168233
18 Dongyu Street, Square One 11th Floor 1101. Jinjiang District, Chengdu, Sichuan Province, China